
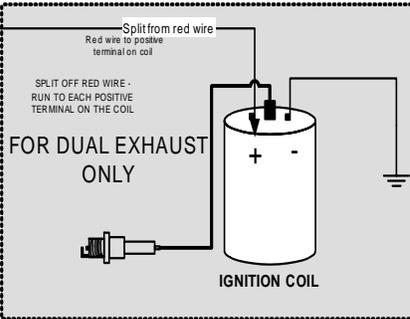


WARNING - This product is not for street use. Do NOT use on the street. Professional installation is always recommended. The below instructions are for reference only. The seller and its affiliates are not responsible for any injuries or property damage resulting from the use of these instructions.

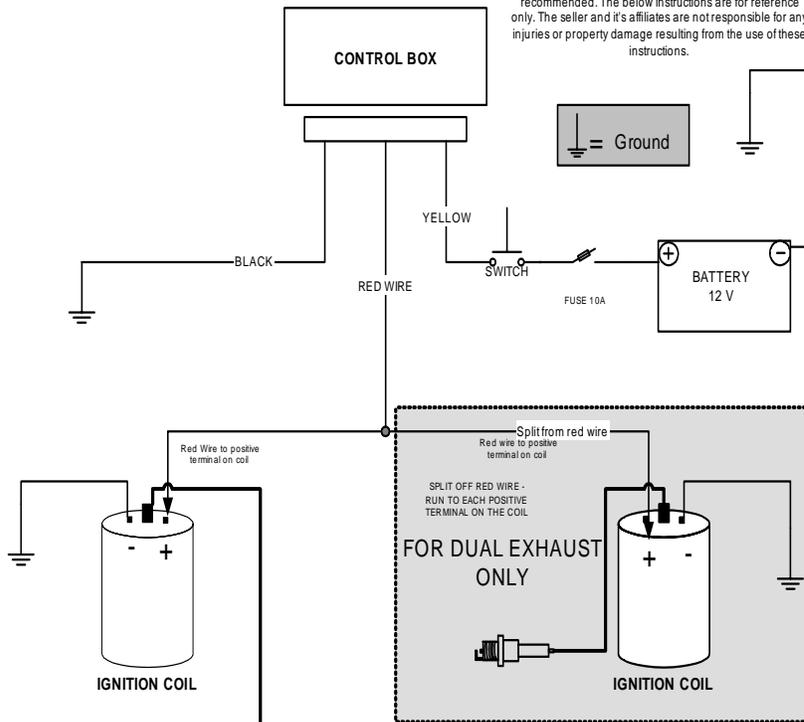

Disconnect the battery

1. Determine location for control box (it must be dry).
2. Mount the control box. A common place to install the control box is in the trunk.
3. Install the spark plugs 3 to 6 inches from the end of the tail pipe. If you want a more permanent installation, follow the diagram to the right to prepare an anti-fouler to hold the spark plug.
4. Follow the wiring diagram above and connect the wires.
5. Test fire the system with engine off (remember to reconnect the battery)

NOTICE:

This kit and instructions is a guide for setting up a means to shoot flames; you will have to tune or make changes to your vehicle to get the desired effect. We can't guarantee the size of flames you will achieve.

Do not activate the system while driving your vehicle.

If you choose to install this kit we strongly encourage professional installation. It may be dangerous without a professional installer. This kit and instructions are designed for off-road use only. Installing and using this kit may not be legal in your local state or city. Check local laws.

SPARK PLUG

